

# Transformer

## TYPE:10K BASE


### Applications:

■ GAS IGNITER.

※Remark:Below here which specific could depend on customized specifications are acceptable.

MECHANICAL DIMENSION:

UNIT mm

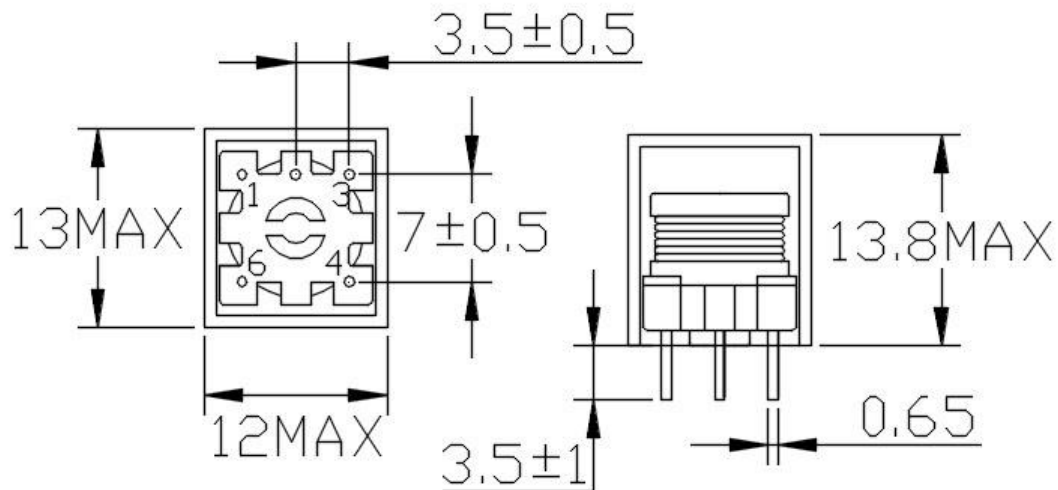

P/N	L (PIN1→PIN2)	L (PIN2→PIN3)	L (PIN3→PIN1)	L (PIN4→PIN6)	L (PIN6→PIN4)	TURNS RATIO	WEIGHT
JC-85073C		130μH±20%	130μH±20%		7.1mH±20%	50×2:400	3.5 g
JC-85078C		290μH±20%	290μH±20%	5.4mH±20%		75×2:350	3.5 g
JC-83132C	330μH±15%	320μH±15%		5.2mH±15%		80×2:350	3.5 g

## JET CHAM ENTERPRISE CO.,LTD

ADDRESS: 3F. NO.41 CHIAU AN ST. CHUNG HO DIST .NEW TAIPEI CITY, TAIWAN R.O.C.

OFFICE TEL:886-2-29253396 ~ 7 FAX.:886-2-29288877

FACTORY TEL:886-2-22447326 ~ 7 FAX.:886-2-22447328

E-mail: [jetcham@ms35.hinet.com](mailto:jetcham@ms35.hinet.com) / [jetcham.coil@msa.hinet.net](mailto:jetcham.coil@msa.hinet.net)